

DYNA SLIDE®

PRE-CUT RV SLIDE-OUT FLOORS

DYNA SLIDE FOR QUALITY

CONSTRUCTION

- Dyna Slide® is a one-piece, ready-to-install oriented strand board (OSB) or plywood panel specifically designed and manufactured for use as a RV slide-out floor.
- Dyna Slide can be specified in three different forms—as a raw T-Rex substrate, with a T-Fuse moisture resistant resin-impregnated overlay, or with a T-Form high-density plastic laminate.
- Dyna Slide is offered pre-cut, square-edge or beveled, with many different thickness, width and length options to lower materials cost and reduce installation time.

CERTIFICATION

- Dyna Slide is produced with fully certified process-control equipment to ensure full compliance with all industrial and performance rated end-use requirements.
- Dyna Slide is manufactured to meet or exceed the standards of U.S. Product Standard PS 2 and all APA—Engineered Wood Association performance rated requirements.
- Dyna Slide is made with MDI and phenol formaldehyde exterior grade adhesives.
- Dyna Slide qualifies for a blanket exemption from U.S. HUD Standard and CARB regulations.

DYNA SLIDE FOR PERFORMANCE

SPECIFICATIONS

Thicknesses: 23/32" & 31/32"

Max. Size: 48" x 289"

DYNA SLIDE OSB

Thickness	Weight
23/32"	2.19 lbs./sq.ft.
31/32"	3.07 lbs./sq.ft.

DYNA SLIDE PLYWOOD

Thickness	Weight
23/32"	2.12 lbs./sq.ft.
31/32"	2.84 lbs./sq.ft.

Dyna Slide is unitized with plastic straps and corner protectors banded to 1-1/2" runners.

HANDLING


Keep Dyna Slide free from moisture and contaminants.

Store indoors on a flat surface, or covered and above ground away from standing water.

Dyna Slide may support mold growth and is at risk of fungal decay if exposed to high moisture environments or repeated wetting.

For best performance, acclimatize Dyna Slide to local equilibrium moisture content before using.

TWO SUBSTRATES, THREE OPTIONS

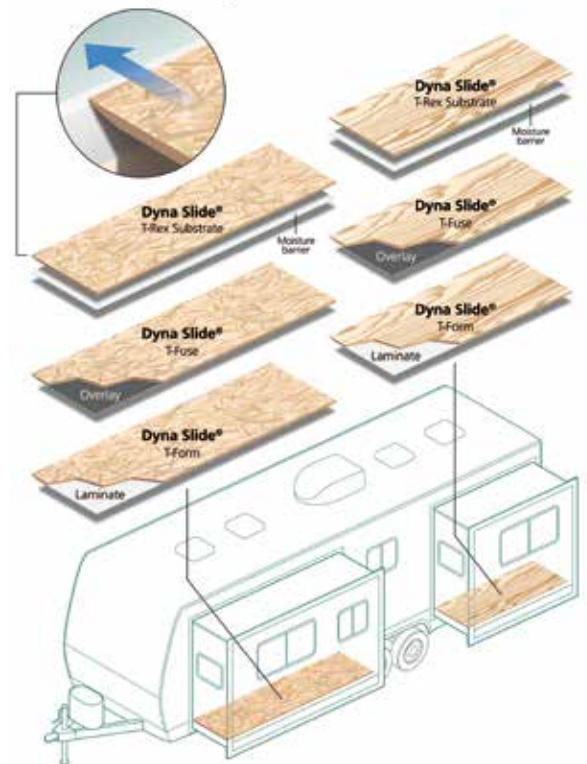

WARRANTY

Dyna Slide will perform as a structural RV slide-out sub-floor when properly installed by an approved RV manufacturer in accordance with accepted industry practices.

Dyna Slide slide-out sub-floors are guaranteed against delamination and manufacturing defects for a minimum of 25 years. See the Dyna Slide Warranty for full details.

Affiliated Resources will not be held liable for any incidental or consequential damages, nor any damages that are the result of the misuse or improper installation of Dyna Slide slide-out floors.



AFFILIATED RESOURCES
PROVIDING SOLUTIONS